


Winkelstahl

DIN EN 10025 / DIN 1029 gleichschenkelig		
Abmessung/mm	6 m	12 m
15 x 15 x 3	•	
20 x 20 x 3	••	
25 x 25 x 3	•	
25 x 25 x 4	•	
30 x 30 x 3	••	
30 x 30 x 5	•	
35 x 35 x 4	•	
40 x 40 x 4	••	
45 x 45 x 5	•	
50 x 50 x 5	••	•
50 x 50 x 6	•	
50 x 50 x 8	•	
55 x 55 x 5	•	
60 x 60 x 6	••	•
60 x 60 x 8	•	
65 x 65 x 7	•	
70 x 70 x 7	••	
75 x 75 x 7	•	
80 x 80 x 8	••	
80 x 80 x 10	•	
90 x 90 x 9	•	
100 x 100 x 8	•	•
100 x 100 x 10	••	••
100 x 100 x 12	•	
120 x 120 x 10	••	
120 x 120 x 11	••	•
120 x 120 x 12	••	•
130 x 130 x 12	••	•
140 x 140 x 13	•	•
150 x 150 x 10	•	•
150 x 150 x 12	•	•
150 x 150 x 15	•	•
160 x 160 x 15	•	•
180 x 180 x 16	•	•
180 x 180 x 18	•	•
200 x 200 x 20	•	•
200 x 200 x 24		•

- schwarz
- schwarz und verzinkt

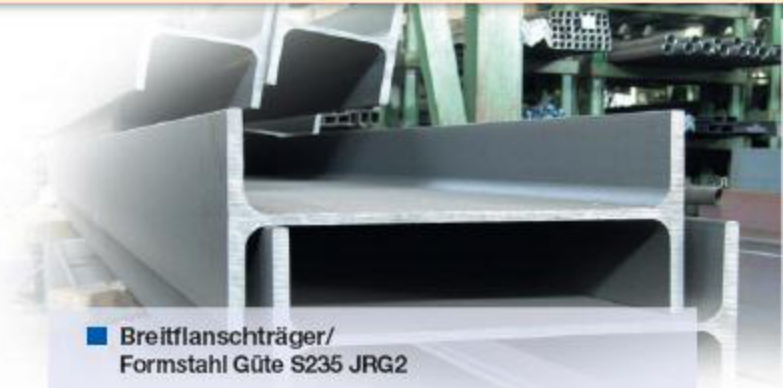

Breitflanschträger/  
Formstahl Güte S235 JRG2

Lagerlänge 12 - 18 m					
HEA	100-320	DIN1025	IPE	80-500	DIN1025
HEB	100-300	DIN1025	UNP	80-400	DIN1026
HEM	100-220	DIN1025			

Alle Abmessungen auch verzinkt lieferbar.

DIN EN 10025 / DIN 1029 ungleichechenklig		
Abmessung/mm	6 m	12 m
30 x 20 x 3	•	
30 x 20 x 4	•	
40 x 20 x 3	•	
40 x 20 x 4	•	
45 x 30 x 4	•	
45 x 30 x 5	•	
50 x 30 x 5	••	
50 x 40 x 5	•	
60 x 30 x 5	••	
60 x 30 x 7	•	
60 x 40 x 5	••	
60 x 40 x 6	•	
60 x 50 x 7	•	
65 x 50 x 5	•	
70 x 50 x 6	•	
75 x 50 x 5	•	
75 x 50 x 7	•	
75 x 55 x 5	•	
75 x 55 x 7	•	
80 x 40 x 6	•	
80 x 40 x 8	•	•
80 x 60 x 7	•	
80 x 65 x 6	•	
80 x 65 x 8	•	
80 x 65 x 10	•	

DIN EN 10025 / DIN 1029 ungleichechenklig		
Abmessung/mm	6 m	12 m
90 x 60 x 6	•	
90 x 60 x 8	•	
100 x 50 x 6	•	•
100 x 50 x 8	•	
100 x 65 x 7	••	
100 x 65 x 9	•	
100 x 75 x 7	••	••
100 x 75 x 9	•	
120 x 80 x 8	•	•
120 x 80 x 10	•	
120 x 80 x 12	•	
130 x 65 x 8	•	
130 x 65 x 10	•	
150 x 75 x 9	•	
150 x 75 x 10	•	•
150 x 75 x 11	•	•
150 x 100 x 10	••	••
160 x 80 x 10	•	•
160 x 80 x 12	•	•
180 x 90 x 10	••	•
200 x 100 x 10	••	••
200 x 100 x 12	•	•
250 x 90 x 10		•
250 x 90 x 12		•